

ECCENTRIC SPRAY NOZZLE

The eccentric spray nozzle is designed without the nozzle insert. Thus, virtually clog-free and excellent for the atomization of liquids with impurities such as industrial water, or viscose solutions such as tar, sludge and liquids with suspended solids. It is suitable for applications with low nozzle pressure.

STANDARD – SPRAY ANGLE

60°, 90°, 120°
other angles on request.



POSSIBLE APPLICATIONS

tank cooling
foam and dust control

treatment plants

AVAILABLE IN THE FOLLOWING MATERIALS

Brass

other materials on request

DIMENSIONS





Typ	A mm	B mm	ØC mm	D mm	E	SW1 mm	SW2 mm
D135							
D135 special top	50	34	28	8	R3/8"	22	24
D454							
D454 special top	54.5	35	36	9	R1/2"	27	30


D135

D454

D135 special top
(hollow cone only)

D454 special top
(hollow cone only)

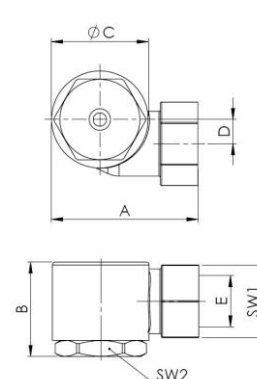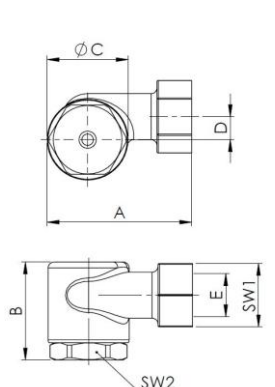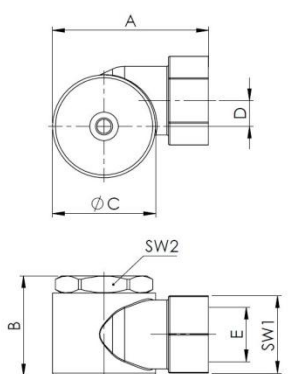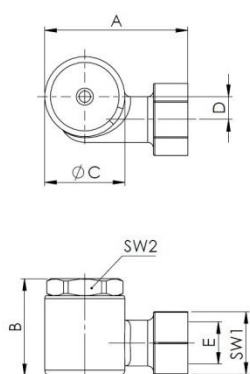

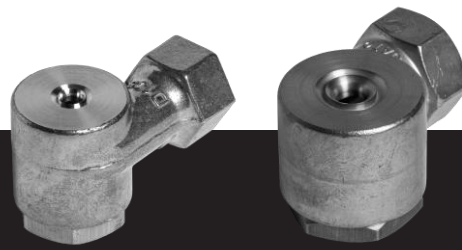

ECCENTRIC SPRAY NOZZLE

CAPACITY CHART OF ECCENTRIC SPRAY NOZZLE

capacities in l/min of water by following pressures

Typ	thread	1 bar	2 bar	3 bar	4 bar (test pressure)	6 bar	8 bar	10 bar
D 135	R 3/8"	1.20	1.70	2.10	2.40	2.95	3.40	3.80
		1.50	2.10	2.60	3.00	3.70	4.20	4.70
		1.80	2.55	3.20	3.60	4.40	5.10	5.70
		2.50	3.50	4.30	5.00	6.10	7.10	7.90
		4.00	5.70	6.90	8.00	9.80	11.30	12.60
		5.20	7.30	9.00	10.40	12.70	14.70	16.50
		6.30	8.80	10.80	12.50	15.30	17.70	19.80
		7.00	9.90	12.10	14.00	17.20	19.80	22.00
		8.80	12.40	15.20	17.50	21.50	24.80	27.70
		10.00	14.10	17.30	20.00	24.50	28.30	31.60
D 454	R 1/2 "	11.50	16.30	19.90	23.00	28.20	32.50	36.40
		7.00	9.90	12.10	14.00	17.20	19.80	22.00
		8.80	12.40	15.20	17.50	21.50	24.80	27.70
		10.00	14.10	17.30	20.00	24.50	28.30	31.60
		11.50	16.30	19.90	23.00	28.20	32.50	36.40
		14.50	20.50	25.00	29.00	35.50	41.00	46.00
		18.50	26.20	32.00	37.00	45.30	52.50	58.50
		23.50	33.30	41.00	47.00	58.00	66.50	74.00

other capacities on request.

FOR ORDERING WE NEED FOLLOWING INFORMATION

Field of application

medium to spray (viscosity)
 fitting position / spray distance nozzle – spray area
 temperature range
 frequency range


Nozzle specification

type of material
 desired spray angle
 nozzle type
 connection thread
 desired capacity (l/min, l/h)
 operating pressure (bar)

Jato-Düsenbau AG

Täschmattstrasse 23, CH-6015 Luzern, Schweiz, Tel: +41 41 269 88 30 Fax: +41 41 269 88 31 www.jato.ch info@jato.ch

VER.02/22

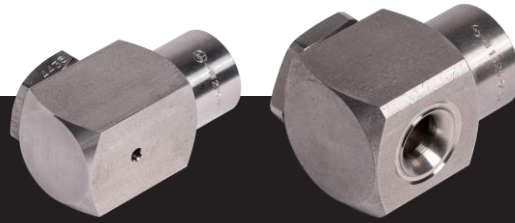

ECCENTRIC SPRAY NOZZLE

The eccentric spray nozzle is designed without the nozzle insert. Thus, virtually clog-free and excellent for the atomization of liquids with impurities such as industrial water, or viscose solutions such as tar, sludge and liquids with suspended solids. It is suitable for applications with low nozzle pressure.

STANDARD – SPRAY ANGLE

60°, 90°, 120°
other angles on request.



POSSIBLE APPLICATIONS

tank cooling
foam and dust control



treatment plants


AVAILABLE IN THE FOLLOWING MATERIALS

Stainless steel, 1.4435 (X2 CrNiMo 18-14-3)

DIMENSIONS

Type	A mm	B mm	C mm	∅D mm	E	SW mm	F mm
D135	52	31	25	22	R3/8"	24	37
D454	54.5	41	35	29	R1/2"	32	36.5

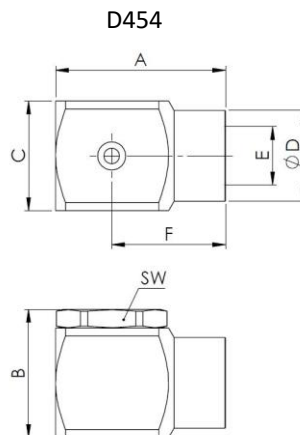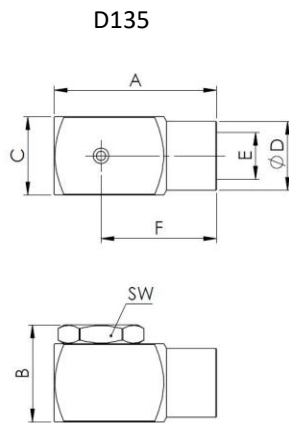

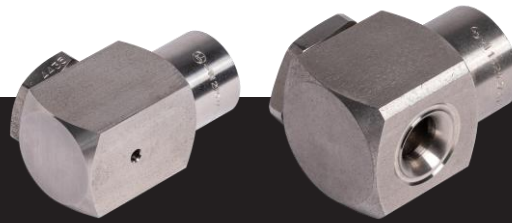

ECCENTRIC SPRAY NOZZLE

CAPACITY CHART OF ECCENTRIC SPRAY NOZZLE

capacities in l/min of water by following pressures

type	thread	1 bar	2 bar	3 bar	4 bar (test pressure)	6 bar	8 bar	10 bar
D 135	R3/8"	1.20	1.70	2.10	2.40	2.95	3.40	3.80
		1.50	2.10	2.60	3.00	3.70	4.20	4.70
		1.80	2.55	3.20	3.60	4.40	5.10	5.70
		2.50	3.50	4.30	5.00	6.10	7.10	7.90
		4.00	5.70	6.90	8.00	9.80	11.30	12.60
		5.20	7.30	9.00	10.40	12.70	14.70	16.50
		6.30	8.80	10.80	12.50	15.30	17.70	19.80
		7.00	9.90	12.10	14.00	17.20	19.80	22.00
		8.80	12.40	15.20	17.50	21.50	24.80	27.70
		10.00	14.10	17.30	20.00	24.50	28.30	31.60
D 454	R 1/2 "	11.50	16.30	19.90	23.00	28.20	32.50	36.40
		7.00	9.90	12.10	14.00	17.20	19.80	22.00
		8.80	12.40	15.20	17.50	21.50	24.80	27.70
		10.00	14.10	17.30	20.00	24.50	28.30	31.60
		11.50	16.30	19.90	23.00	28.20	32.50	36.40
		14.50	20.50	25.00	29.00	35.50	41.00	46.00
		18.50	26.20	32.00	37.00	45.30	52.50	58.50
		23.50	33.30	41.00	47.00	58.00	66.50	74.00

other capacities on request.

FOR ORDERING WE NEED FOLLOWING INFORMATION

Field of application

medium to spray (viscosity)
 fitting position / spray distance nozzle – spray area
 temperature range
 frequency range

Nozzle specification

type of material
 desired spray angle
 nozzle type
 connection thread
 desired capacity (l/min, l/h)
 operating pressure (bar)

Jato-Düsenbau AG

Täschmattstrasse 23, CH-6015 Luzern, Schweiz, Tel: +41 41 269 88 30 Fax: +41 41 269 88 31 www.jato.ch info@jato.ch

VER.02/22