




FULL CONE NOZZLE VKA-S

The full cone, hollow cone, or flat/round spray nozzles feature an adjustable nozzle. The uniform spraying of the medium guarantees optimal distribution of the droplets. The ball nozzle allows the spray pattern to be directed as desired, ensuring maximum flexibility.

STANDARD – SPRAY ANGLE

45°, 60°, 90°
other angles on request.

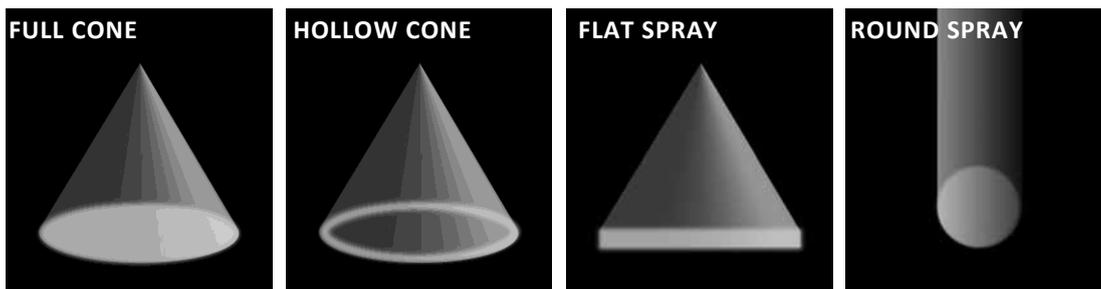

POSSIBLE APPLICATIONS

air- and gas washing
flue gas washing
cleaning systems
tank cooling
foam control
washing systems
filling layer sprinkling
dust control

FIELD OF APPLICATION

food industry
pharma
chemistry
petrochemistry

AVAILABLE IN THE FOLLOWING MATERIALS


Stainless Steel

1.4435 (X2 CrNiMo 18-14-3)

Non-ferrous material

brass

other material on request.

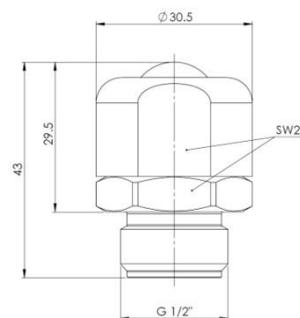

FOR ORDERING WE NEED FOLLOWING INFORMATION

Field of application

medium to spray (viscosity)
fitting position / spray distance nozzle – spray area
temperature range
frequency range

Nozzle specification

type of material
desired spray angle
desired capacity (l/min, l/h)
operating pressure (bar)

Jato-Düsenbau AG

Täschmattstrasse 23, CH-6015 Luzern, Schweiz, Tel: +41 41 269 88 30 Fax: +41 41 269 88 31 www.jato.ch info@jato.ch

VER.08/25